


18717 - EZFOUNT Garden Hose Adapter Pkg

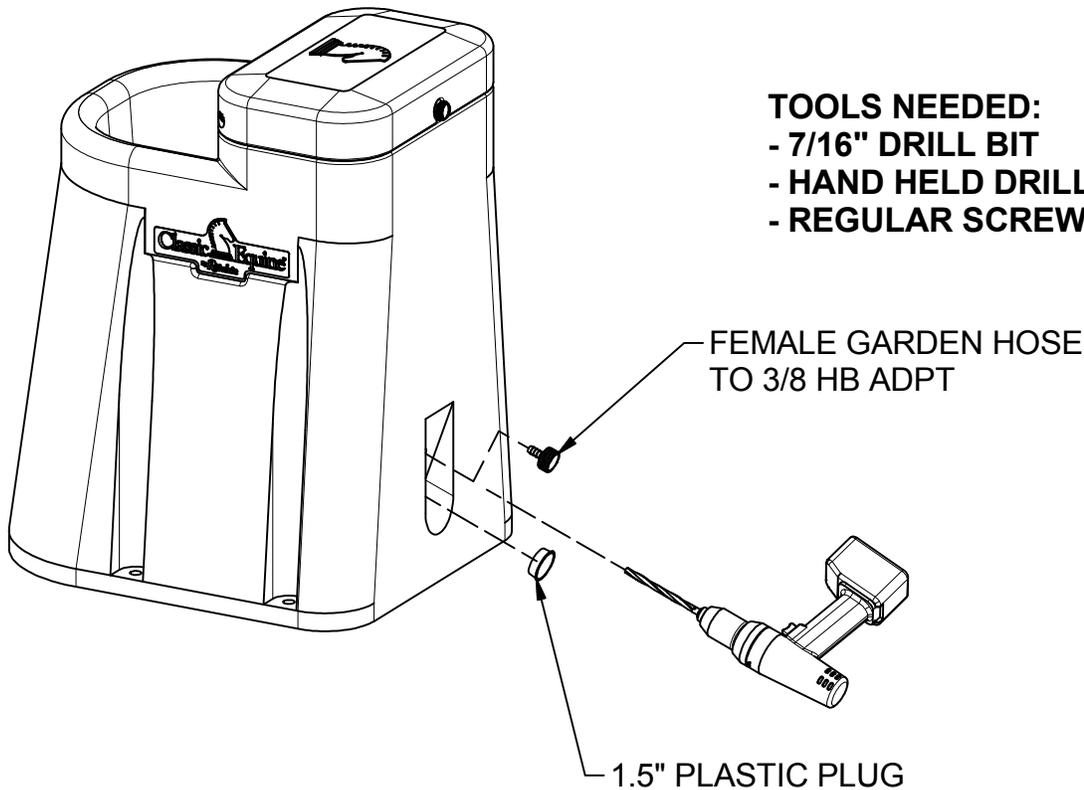

TOOLS NEEDED:
- 7/16" DRILL BIT
- HAND HELD DRILL
- REGULAR SCREWDRIVER

To replace an old style bulk head garden hose adapter:

1. Remove red plug in bottom of unit, reach in and unscrew the nut on the bulkhead assembly.
2. Pull the bulkhead assembly out of the unit to get access to the hose clamp.
3. Loosen the hose clamp and slide it up the hose, remove the hose from the hose barb.
4. Discard the old style bulkhead garden hose adapter.
5. Drill a 7/16" hole approximately 2" above the existing 1.5" hole.
6. Push the new brass 3/8" hose barb to female garden hose adapter into the 7/16 hole.
7. Slide the hose onto the hose barb, slide the hose clamp down to the hose barb and tighten.
8. Place the included 1.5" red plastic plug into the 1.5" bulkhead hole.
9. Replace the large red plug in the bottom of the unit.

If you have a new style EZFount that came with the 3/8" HB to FGH adapter:

1. Remove red plug in bottom of unit, reach in and unscrew the hose clamp on the hose barb.
2. Slide hose clamp up the hose and remove the hose from the hose barb.
3. Remove old hose barb to garden hose adapter, insert new garden hose adapter.
4. Slide hose onto the new adapter hose barb, slide the hose clamp over the barb.
5. Tighten the hose clamp on the hose, and reinstall the large red plug in the bottom.