


EcoFount



EcoFount 1
18430

EcoFount 2
18440

OmniFount

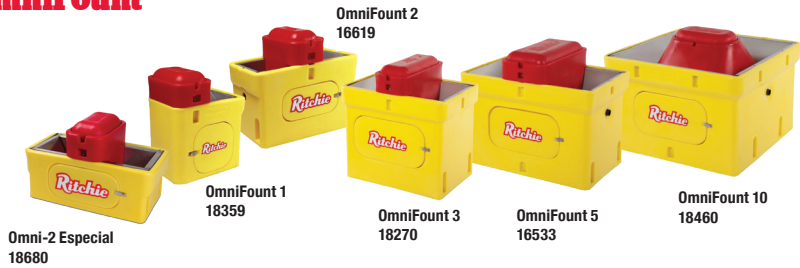

Omni-2 Especial
18680

OmniFount 1
18359

OmniFount 2
16619

OmniFount 3
18270

OmniFount 5
16533

OmniFount 10
18460

WaterMatic



WaterMatic 300
18050

WaterMatic 1000
18110

WaterMatic 150S
18222

WaterMatic 100
18165

WaterMatic 150
18166


StallFount



StallFount sin calefacción
16871

StallFount 125 con calefacción
18082

Genesis



Genesis GC-2
18890

Genesis G1
18880

Genesis G2
18885

Thrifty King



CT4-2000
16430

CT6
16440

CT1-2000
16271

CT2-2000
16299

WaterMaster



WaterMaster 96
18007

WaterMaster 90
16467

WaterMaster 54
16542

WaterMaster 800
18820

WaterMaster 600
18171

WaterMaster 1200
18053

WaterMaster 54
18355

OmniMaster 8



OMNIMASTER 8
18860

Classic Equine por Ritchie



AutoFount 1
18770

UltraFount 1
18780

EZFount
18710

UltraFount
18730

AutoFount
18720

StallFount sin calefacción
18748

StallFount con calefacción
18740

CattleMaster



CattleMaster 480
18248

CattleMaster 840
18235

CattleMaster 1440
18252

CattleMaster 10T
18700

ESPECIFICACIÓN DEL MODELO RITCHIE DE 120 V

MODELO	N.º DE PIEZA	LARGO IN/CM	ANCHO IN/CM	ALTURA TOTAL IN/CM	ALTURA AL BEBER IN/CM	PESO DE ENVÍO LB/KG	CALOR (CF = flujo constante)	CAPACIDAD GALONES/LITROS	CAPACIDAD DE COMBINACIÓN
ECOFOUNT									
EcoFount 2	18440	36/91	18.5/47	20/51	20/51	75/34	298 W (2.5 A a 120 V)	6.5/25	60 vacas de engorda, 60 caballos, 30 vacas lecheras
EcoFount 1	18430	22/56	18/46	20/51	20/51	41/19	173 W (1.4 A a 120 V)	3.5/13	30 vacas de engorda, 30 caballos, 15 vacas lecheras
OMNIFOUNT									
OmniFount 10	18460	40.5/103	40.5/103	31.5/80	26/66	150/68	1048 W (8.7 A a 120 V)	28/106	275 vacas de engorda, 135 vacas lecheras
OmniFount 5	16533	40/102	23.5/60	33/84	26/66	92/42	548 W (4.6 A a 120 V)	16/61	150 vacas de engorda, 150 caballos, 75 vacas lecheras
OmniFount 3	18270	31.5/80	22/56	33/84	26/66	77/35	548 W (4.6 A a 120 V)	10/38	100 vacas de engorda, 100 caballos, 50 vacas lecheras
OmniFount 2	16619	28.3/72	14.5/37	25/64	18/46	45/20	298 W (2.5 A a 120 V)	2.2/8	40 vacas de engorda, 40 caballos, 20 vacas lecheras
Omni-2 Especial	18680	28.3/72	14.5/37	18/46	11/28	34/15	298 W (2.5 A a 120 V)	2.2/8	100 ovejas o cabras
OmniFount 1	18359	20/51	14.5/37	25/64	18/46	39/18	173 W (1.4 A a 120 V)	1.5/6	20 vacas de engorda, 20 caballos, 10 vacas lecheras
WATERMATIC									
1000	18110	42/107	42/107	32/81	26/66	129/59	Opt Imm & Self-Reg Heat Cbl	22/83	275 vacas de engorda, 135 vacas lecheras
300	18050	36/91	21.5/55	31/79	26/66	71/32	Opt Imm & Self-Reg Heat Cbl	8.2/31	125 vacas de engorda, 125 caballos, 60 vacas lecheras
150S	18222	33.5/85	14/36	22.5/57	13/33	41/19	Opt Imm & Self-Reg Heat Cbl	4.2/16	100 ovejas o cabras
150	18166	33.5/85	14/36	23.5/60	18/46	50/23	Opt Imm & Self-Reg Heat Cbl	4.2/16	40 vacas de engorda, 40 caballos, 100 ovejas
100	18165	24.5/62	14/36	23.5/60	18/46	38/17	Opt Imm & Self-Reg Heat Cbl	2.8/11	20 vacas de engorda, 20 caballos, 50 ovejas
WATERMASTER									
WM 1200	18053	144/366	24/61	29/72	24/61	265/120	CF Opt/Opt Imm & Self-Reg Heat Cbl	60/227	500 vacas de engorda, 250 vacas lecheras
WM 96	18007	96/244	33/84	28/71	22/56	210/95	CF Std/Opt Imm & Self-Reg Heat Cbl	75/284	300 vacas de engorda, 150 vacas lecheras
WM 90	16467	90/229	33/84	28/71	22/56	182/83	CF Std/Opt Imm & Self-Reg Heat Cbl	30/114	300 vacas de engorda, 150 vacas lecheras
WM 800	18820	96/244	24/61	27/69	24/61	150/70	Opt Imm & Self-Reg Heat Cbl	52/197	360 vacas de engorda, 180 vacas lecheras
WM 600	18171	72/183	24/61	28.5/72	24/61	132/60	CF Opt/Opt Imm & Self-Reg Heat Cbl	28/106	250 vacas de engorda, 125 vacas lecheras
WM 54	16542	54/137	33/84	28/71	22/56	125/57	CF Std/Opt Imm & Self-Reg Heat Cbl	18/68	200 vacas de engorda, 100 vacas lecheras
WM 54 Deep	18355	54/137	33/84	28/71	22/56	125/57	CF Std/Opt Imm & Self-Reg Heat Cbl	54/204	200 vacas de engorda, 100 vacas lecheras
CATTLEMASTER									
CM 1440	18252	146/370	23.5/59.7	24/61	16/41	186/84	1298 W (10.9 A a 120 V)/CF	60/227	475 vacas de engorda, 240 vacas lecheras
CM 10T	18700	120/305	32/81	33/84	25/64	235/107	1048 W (8.7 A a 120 V)/CF	50/189	400 vacas de engorda, 200 vacas lecheras
CM 840	18235	86/218.4	23.5/59.7	24/61	16/41	123/56	1048 W (8.7 A a 120 V)/CF	35/133	300 vacas de engorda, 150 vacas lecheras
CM 480	18248	51/129.5	23.5/59.7	24/61	16/41	90/41	548 W (4.6 A a 120 V)/CF	20/76	200 vacas de engorda, 100 vacas lecheras
OMNIMASTER									
OmniMaster 8	18860	96/244	24/61	30/76.2	24/61	169/77	1048 W (8.7 A a 120 V)	52/197	360 vacas de engorda, 180 vacas lecheras
GENESIS									
GENESIS G1	18880	23.5/59.7	22.5/57	23/58.4	18/46	27/12.2	No apto para uso en climas fríos	4/15	30 vacas de engorda
GENESIS G2	18885	36.25/92	22.5/57	23/58.4	18/46	36/16.4	No apto para uso en climas fríos	8/30	60 vacas de engorda
GENESIS GC-2	18890	42/106.7	24/60.7	22/55.9	18/46	50/23	No apto para uso en climas fríos	28/106	100 vacas de engorda
THRIFTY KING									
CT6	16440	72.5/184	39/99	25/64	19/48	210/95	Opt Imm & Self-Reg Heat Cbl	55/208	300 vacas de engorda
CT4-2000	16430	43/109	35/89	25/64	19/48	123/56	Opt Imm & Self-Reg Heat Cbl	45.5/172	200 vacas de engorda
CT2-2000	16299	43/109	24/61	25/64	18/46	90/41	Opt Imm & Self-Reg Heat Cbl	28/106	100 vacas de engorda
CT1-2000 GC-2	16271	28/71	20.3/51	25/64	19/48	61/28	Opt Imm & Self-Reg Heat Cbl	11.2/42	30 vacas de engorda
STALLFOUNT									
StallFount 125	18082	14/36	13/33	Ajustable	Ajustable	30/14	173 W (1.4 A a 120 V)	1.9/7	Caseta sencilla
StallFount	16871	14/36	13/33	10.5/27	Ajustable	14/6	N/A	1.9/7	Caseta sencilla
Juego de cortina	18092	19.4/49 c/u	7/18	Hasta 4'	Hasta 4'	13/6	N/A	N/A	N/A
CLASSIC EQUINE POR RITCHIE									
EZ Fount	18710	23/58.4	20/50.8	28.5/72.5	24/61	32/14.5	NO APTO PARA USO EN CLIMAS FRÍOS	3.8/14.3	20 caballos
AutoFount 1	18770	20.5/52	20/51	28/71	24/61	45/20	Opt Imm Heater & Self-Reg Heat Cbl	2/7.6	20 caballos
AutoFount	18720	30/76.2	20/51	28.5/72.5	24/61	50/22.7	Opt Imm Heater & Self-Reg Heat Cbl	3.2/12	40 caballos
UltraFount 1	18780	20.5/52	20/51	29/74	24/61	45/20.4	173 W (1.4 A a 120 V)	1.5/5.7	20 caballos
UltraFount	18730	30.5/77.5	20/51	29/74	24/61	65/29.4	298 W (2.5 A a 120 V)	3.1/12	40 caballos
StallFount sin calefacción	18748	16.5/41.9	16.5/41.9	12/30.5	Ajustable	20/9.1	Sin calefacción	1/3.79	Caseta sencilla
StallFount con calefacción	18740	16.5/41.9	16.5/41.9	12/30.5	Ajustable	22/10	173 W (1.4 A a 120 V)	1/3.79	Caseta sencilla
StallFount con cortina de 20"	18744	19/48.3	7/17.8	20/50.8	32/81	9/4.08	N/A	N/A	N/A
StallFount con cortina de 30"	18746	19/48.3	7/17.8	30/76.2	42/107	14/6.4	N/A	N/A	N/A